


SHENZHEN DEP Electronics Co., Ltd  
 深圳德平电子有限公司

法兰衰减器  
 Flange Attenuators

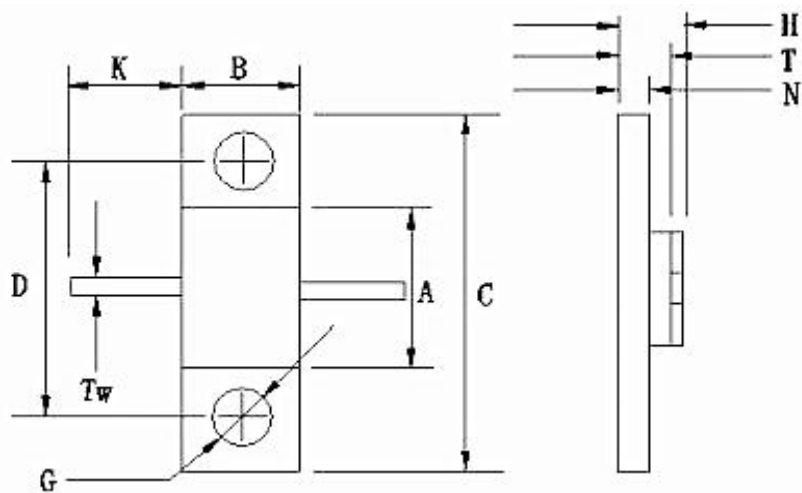

Part Number	Power (Max) W	Frequency (Ghz)	Dimensions (mm)									
			A	B	D	C	Tw	T	N	H	K	G
RFT030C100P1	30	DC-3GHZ	6	6	13	16	1	2.7	1.5	3.8	6	3.0
RFT030C100P2	30	DC-3GHZ	6	6	14.2	20	1	2.7	1.5	3.8	6	3.0
RFT060C100P1	60	DC-3GHZ	6	9	13	16	1	2.7	1.5	3.8	6	3.0
RFT060C100P2	60	DC-3GHZ	6	9	14.2	20	1	2.7	1.5	3.8	6	3.0
RFT100C100P1	100	DC-3GHZ	9.5	9.5	18.4	25	2	4.5	3	5.5	6	3.5
RFT100C100P2	100	DC-3GHZ	10	10	18.4	25	2	4.5	3	5.5	6	3.5
RFT250C100P1	250	DC-0.5GHZ	12	10	18.4	25	3	4.6	3	5.8	6	3.5

电话: 0755-23023733  
 传真: 0755-85287900

Email: xufei66@dephk.com  
<http://www.dephk.com>